
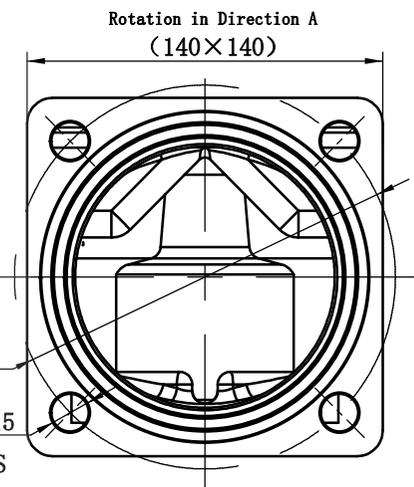
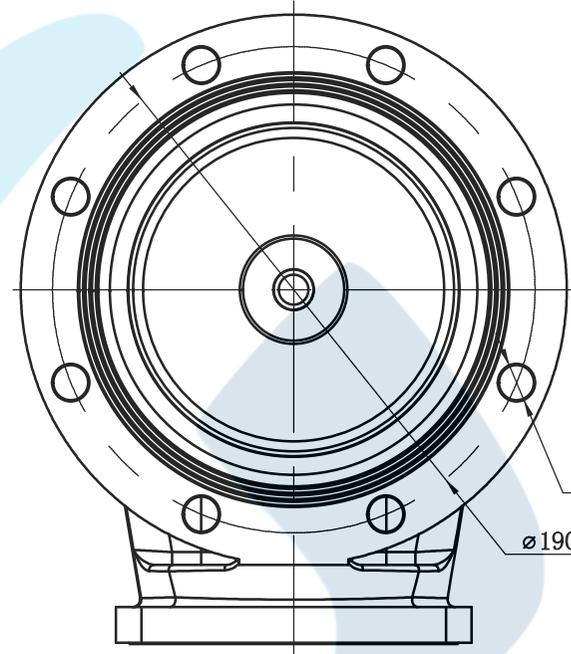


KT02-100Y

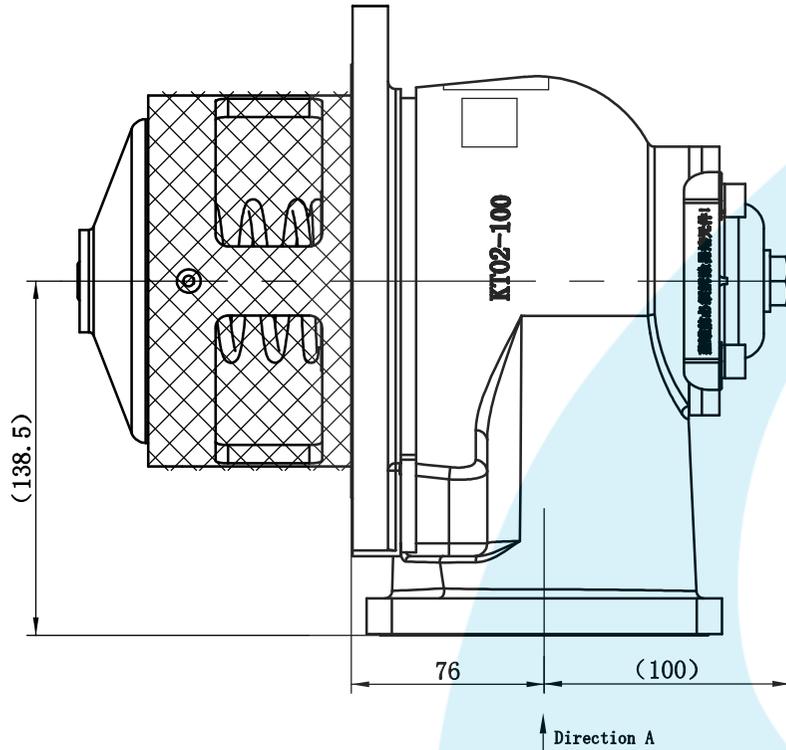

**Foot Valve**


Model : KT02-100  
 Code : KT02-100y  
 PN : 600KPa  
 No : 25072000  
 Temperature : -20 $^{\circ}$ C ~ +70 $^{\circ}$ C  
 ADR NO : 1493/5/2015  
 Imported by  
 PT. PAMCHAN BERKAH PRESTISI INDONESIA

Marking Information

**Technical Requirements**

1. Execution Standard: EN 13308-2002&QC/T 932-2018;
2. Design Temperature: -20 $^{\circ}$ C ~ +70 $^{\circ}$ C;
3. Applicable Medium: light fuels such as gasoline and diesel;
4. Gas source pressure range: 400~800KPa;
5. Tighten bolts to evenly to a torque setting of 30-35Nm;
6. Sealing material: Viton.

B

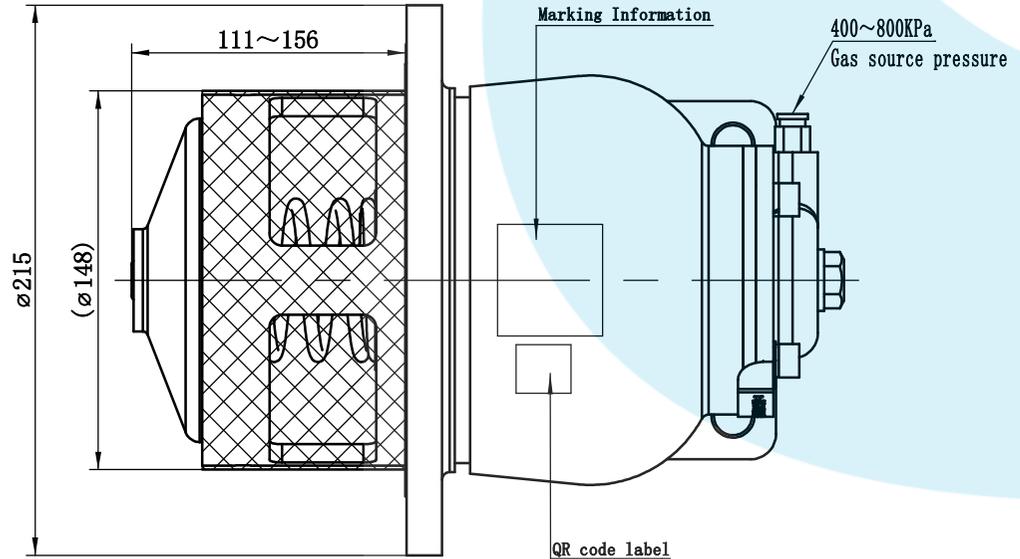

REV.	NUM.	NOTE	DOC. NO.	SIG.	DATE
DES.			CRA.		
DWG.					
REV.					
APPD.					

**CHANGZHOU KAIPENG HYDRO-EQUIPMENT CO., LTD**

MATERIAL	Main material: Aluminum	<b>Foot Valve</b>
PROJECTION	SCALE	
WEIGHT		KT02-100y